


BIG BLUE® Filter Housings

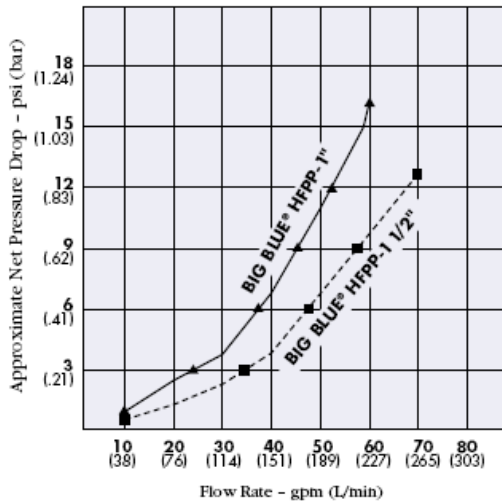

The 150467, 150408, 150409, 150470 are Tested and Certified by NSF International to ANSI/NSF Standard 42 and structural integrity for material requirements only.

Housing Specifications and Performance Data

Model	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)
10" BB-3/4"	13-1/8" x 7-1/4" (333 mm x 184 mm)	2 psi @ 15 gpm (0.1 bar @ 57 L/min)
10" BB-1"	13-1/8" x 7-1/4" (333 mm x 184 mm)	1 psi @ 15 gpm (0.1 bar @ 57 L/min)
10" BB-1-1/2"	13-5/8" x 7-1/4" (346 mm x 184 mm)	1 psi @ 20 gpm (0.1 bar @ 76 L/min)
20" BB-3/4"	23-3/8" x 7-1/4" (594 mm x 184 mm)	2 psi @ 15 gpm (0.1 bar @ 57 L/min)
20" BB-1"	23-3/8" x 7-1/4" (594 mm x 184 mm)	1 psi @ 15 gpm (0.1 bar @ 57 L/min)
20" BB-1-1/2"	23-7/8" x 7-1/4" (606 mm x 184 mm)	1 psi @ 20 gpm (0.1 bar @ 76 L/min)

Materials of Construction

- **Housing** Polypropylene
- **Cap** Polypropylene (HFPP)
- **Button Assembly** 300-series Stainless Steel and Polypropylene
- **O-Ring** Buna-N
- **Maximum Temperature** 100 °F (37.8 °C)
- **Maximum Pressure** #10BB - 100 psi (6.9 bar)
#20BB - 90 psi (6.2 bar)

CAUTION: Filter must be protected against freezing, which can cause cracking of the filter and water leakage.

Plymouth Products

502 Indiana Avenue • Sheboygan, WI 53081
USA/Canada: 800-645-0267 phone • 888-203-7361 fax
International: 920-451-9322 phone • 920-457-2417 fax

www.plymouthwater.com
02/03 310053